



Follow these steps to complete your model.

- 1 - Cement Upper and Lower Fuselage Halves together.
- 2 - Cement 2 pairs of Jet Engine Halves together.
NOTE: The right and left engines are not identical; they are mirror images. Be sure that each engine has one raised bar on one side, and two bars on the other.

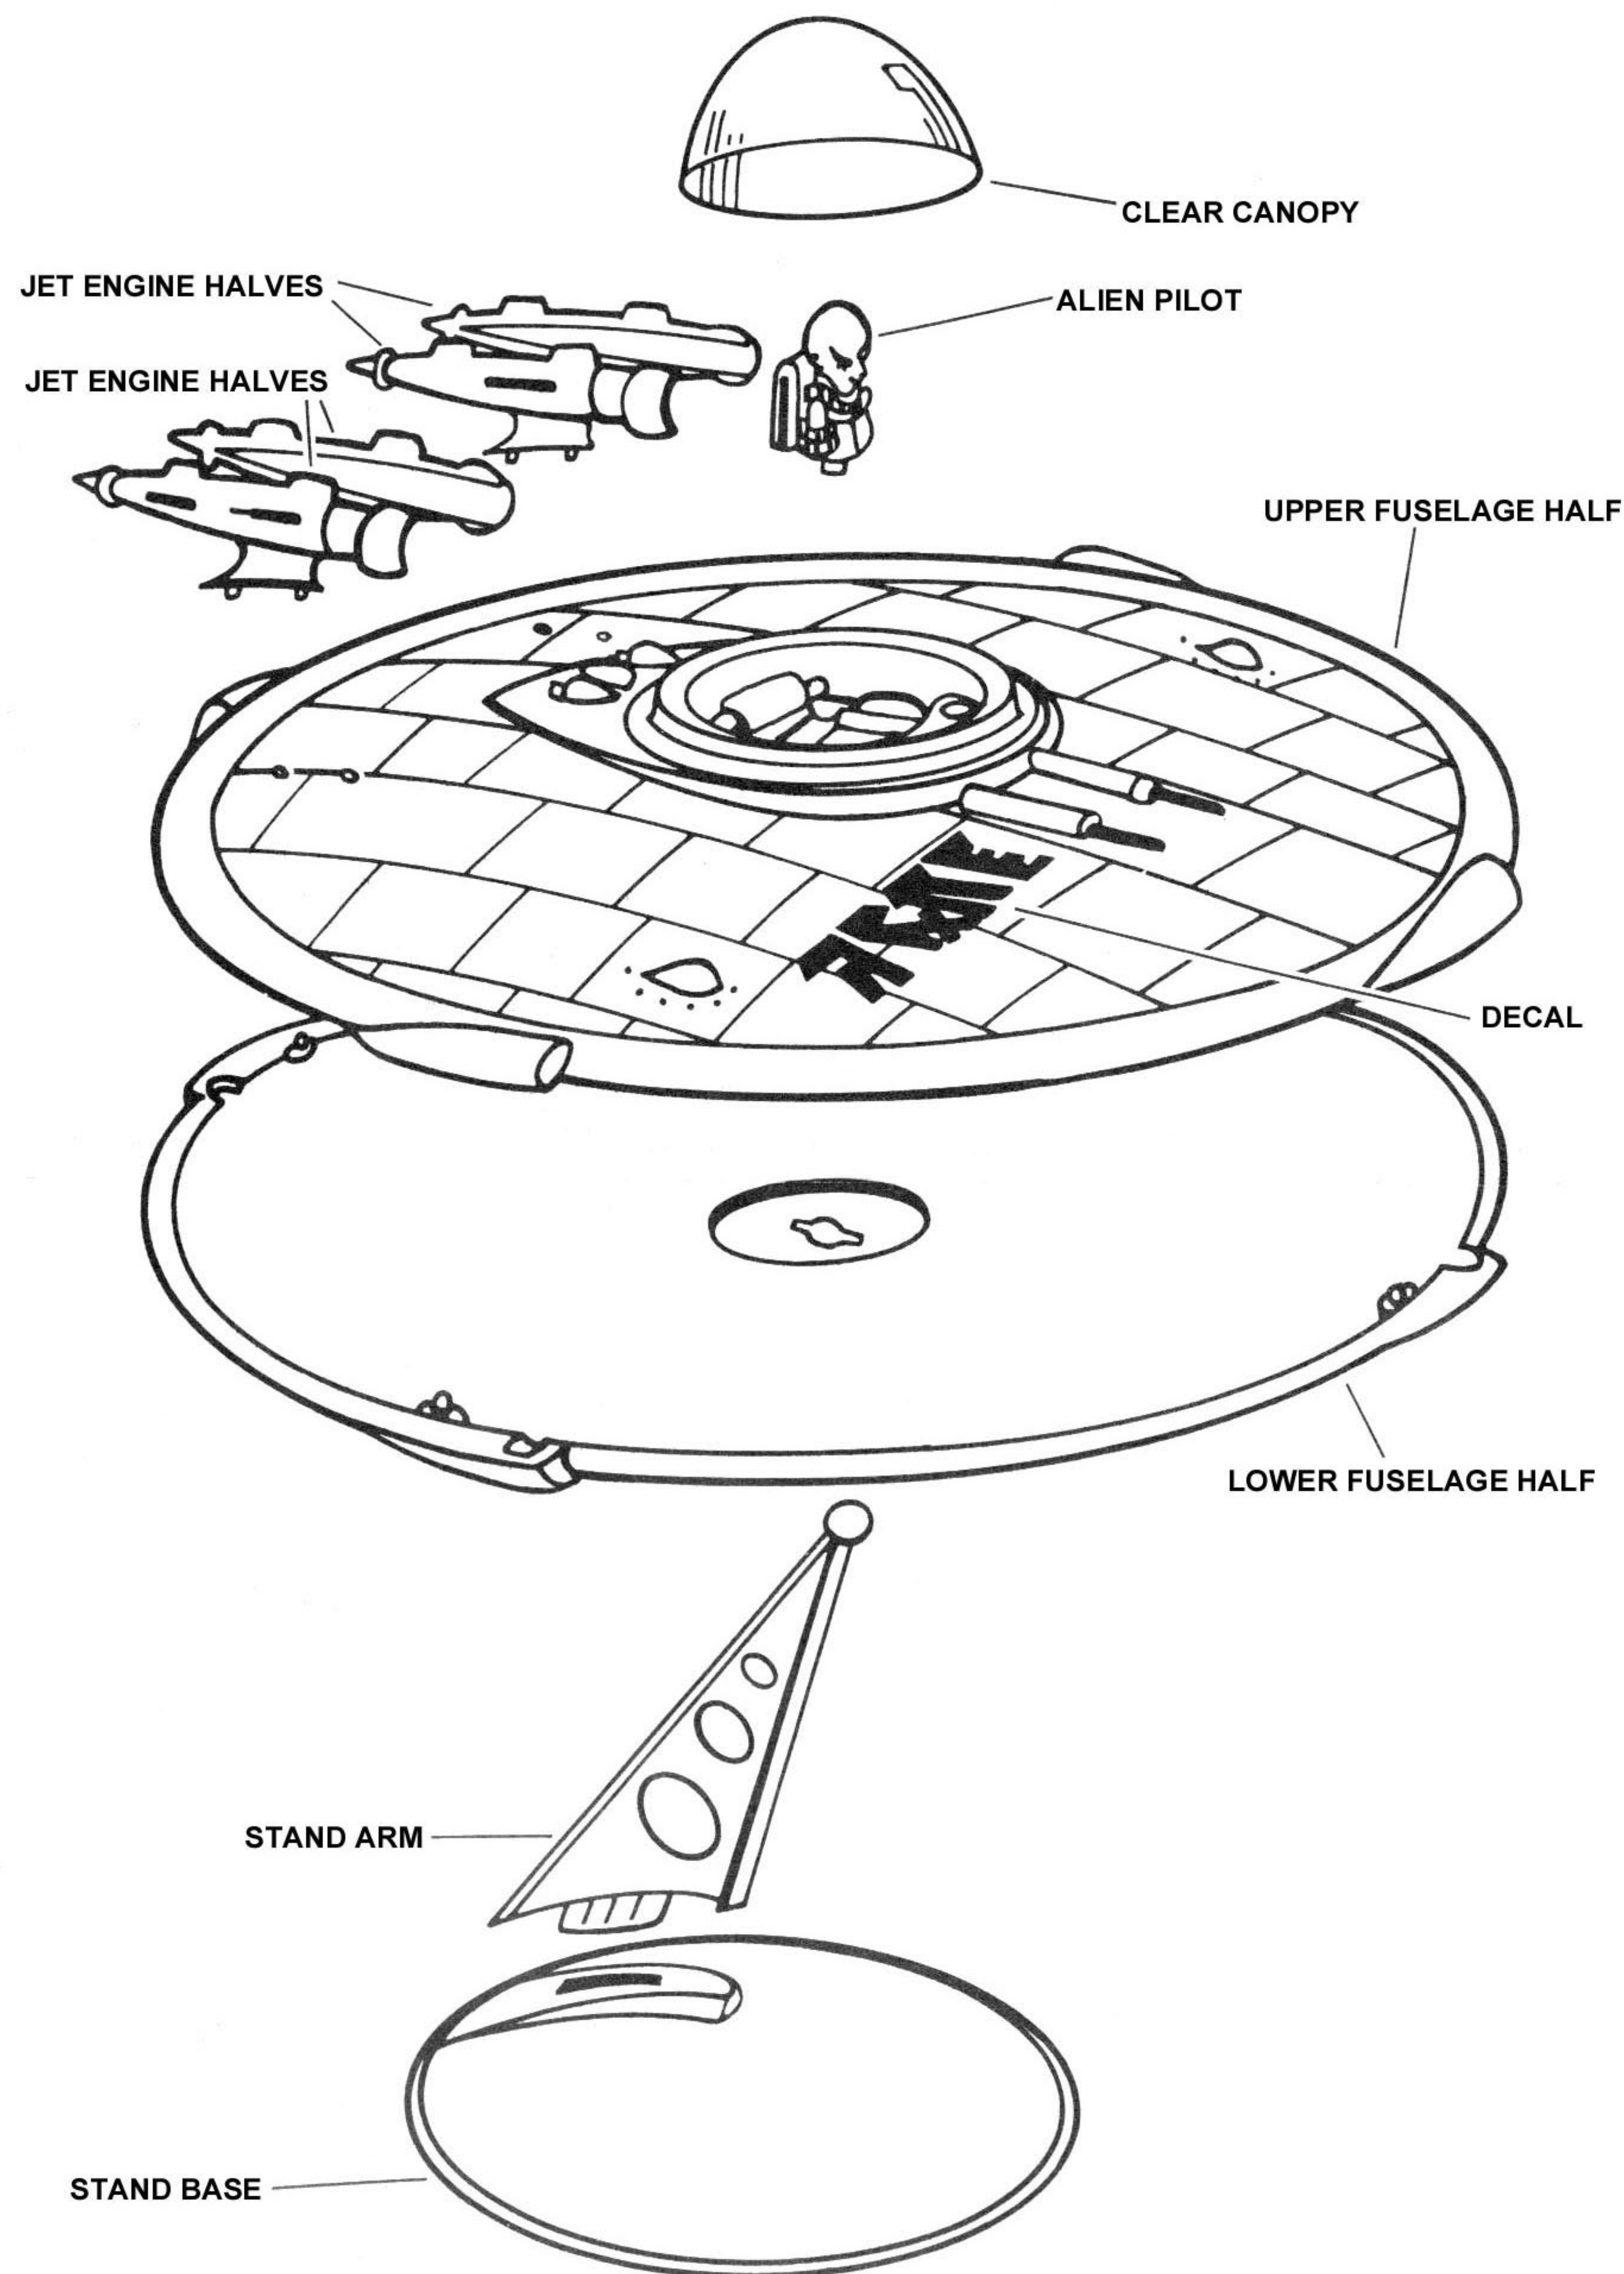

- 3 - Cement assembled Jet Engines to Fuselage.
- 4 - If desired, paint cockpit in Upper Fuselage Half and Alien Pilot. When dry, cement Pilot into cockpit.
- 5 - Cement clear Canopy to Fuselage.
- 6 - Cement Stand Arm to Stand Base.
- 7 - Apply Decal to Fuselage.
- 8 - Snap, do not cement, completed Flying Saucer to Stand Arm. The ball joint will allow the model to be displayed in a number of positions.

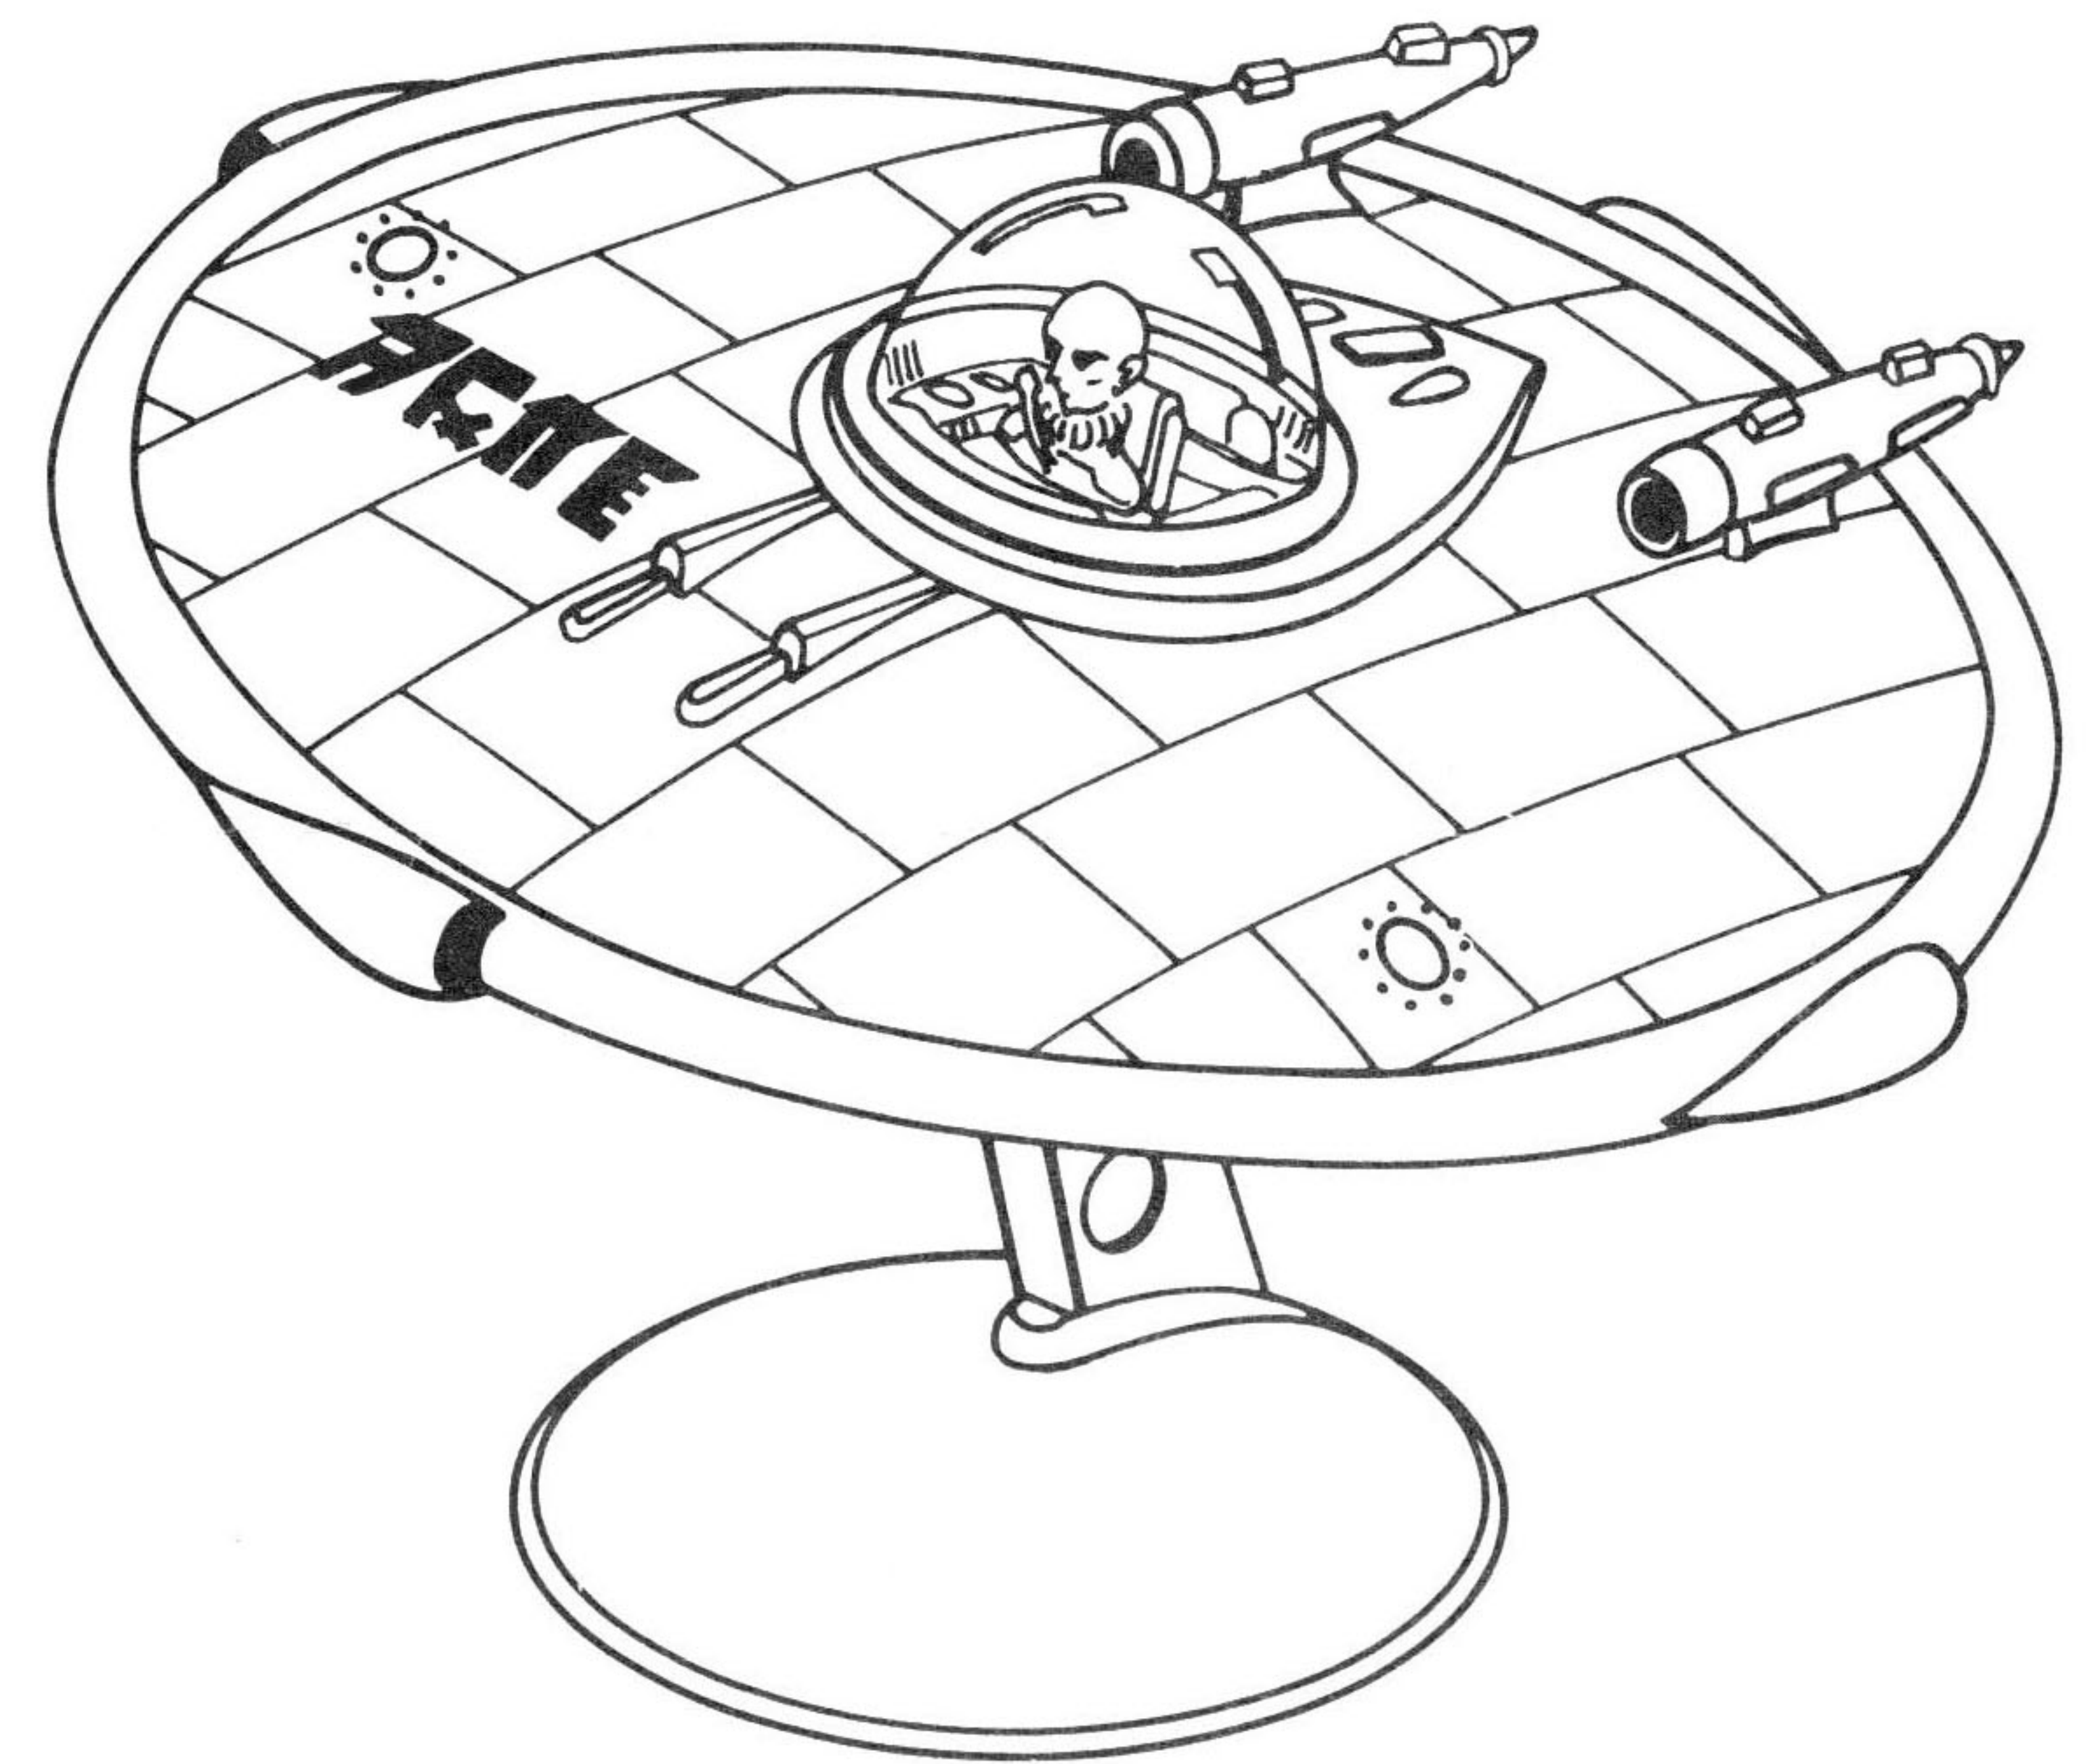

NOTE: The Alien Pilot in this kit is molded in Glow-in-the-Dark plastic. To make the Pilot glow, hold the model close to a light, such as a lamp, or leave it in a sunny area near a window. Then take the model into a dark room to see the Alien glow!

You might want to paint the Pilot's flight suit and seat back and leave just his head glow.